

Work Order ID 141303

141303

Page 1

Wednesday, February 03, 2016 4:29:41 PM

Item ID: D4917-300 Accept ***N900040100*** Setup Start ***NS1***
 Revision ID: Stop ***NS2***
 Item Name: Placard, Max Load
 Start Date: 1/29/2016 Start Qty: 10.00 ***10*** Cust Item ID:
 Required Date: 2/3/2016 Req'd Qty: 10.00 ***10*** Customer:
 Reference:

Approvals: Process Plan: MLS Date: FEB 04 2016 Tooling: _____ Date: _____ Run Start ***NR1***
 QC: _____ Date: _____ SPC (Y/N): _____ Date: _____ Stop ***NR2***

Sequence ID/ Work Center ID	Operation Description	Set Up/ Run Hours	Tool ID	Tool #	Plan Code	Accept Qty	Reject Qty	Reject Number	Insp. Stamp
Draw Nbr	Revision Nbr								
D4917	A								

100 0.00 ***100*** 10 FEB 05 2016 DAS 13
 Purchasing Memo 0.00
 Purchasing Issue P/O: 31279

E-mail or Ship electronic file and or dwg to vendor
 Manufacture as per Dwg and supplied files
 Possible supplier: Studio Letrage
 Material release note is required.

110 Receive & Inspect for Damage & Mat'l Certs 0.00 ***110*** 10x 80/6-02-11
 Packaging Memo 0.00
 Packaging

DQA: _____ Date: _____



WORK ORDER NON-CONFORMANCE / UPDATE

QA Closed: _____ Date: _____

Work Order update only ☐

Work Order: _____ Part No. _____ NCR No. _____	DISPOSITION Rework ☐ Scrap ☐ Use-as-is ☐ Suspected Unapproved ☐	AGAINST DEPARTMENT/PROCESS Skid-tube ☐ Machining ☐ Thermoforming ☐ Large Fab ☐ Cross tube ☐ Small Fab ☐ Finishing ☐ Composite ☐ Water Jet ☐ Prod. Eng. Coord. ☐ Rec/Store/Packaging ☐ Supplier ☐ Engineering ☐ Quality ☐ Other ☐			
Date :	Step #:	QTY Effective :		MRB (QS1042) Approval	
Description Work Order Deviation		Disposition		Completed By Lead hand / Supervisor Approval Verification QC / QA Coordinator Approval	
Root Cause Environment ☐ Design ☐ Doc/Data ☐ Equip/Tooling ☐ Handling/Pre ☐ Material ☐ Internal Transport ☐ Tribal Knowledge ☐ LOA ☐ Substation ☐ Past Expiry Date ☐ Misidentified ☐ No Re-verification ☐ Operator ☐ Offset/Setup ☐ Supplier ☐ Training ☐ Use for Testing ☐ Poor Information ☐ Rushing ☐ Product Improvement ☐ Process Improvement ☐ Manufacturing Process ☐ Past Due ☐		FAULT CATEGORY Pressure/Forced ☐ Bending ☐ Centre Not Concentric ☐ Cracks ☐ Crimp/Kink/Ripple/Wave ☐ Cuffs ☐ Crushing ☐ Heat Treat ☐ Wave/Twist in Tube ☐ Marks/Chatter ☐ Temperature/Cure ☐ Set-up ☐ BOM/Route ☐ Broken/Damage/Defect ☐ Inspection Incomplete/Unqualified ☐ Contamination ☐ Countersink ☐ Cut Too Short ☐ Instructions Incomplete/Unclear ☐ Drill Holes ☐ Power Loss/Surge ☐ Folio/Program ☐ Grain ☐ Weld ☐ Wrong Stock Pulled ☐ Out of Sequence ☐ Off-set ☐ Mislabeled ☐ Fit/Function ☐ Misaligned/off center ☐ Positioned Wrong ☐ Outside Dimensions ☐ Over/Under tolerance ☐ Part Incorrect ☐ Part Lost/Missing ☐ Part Moved ☐ Drawing ☐ Finish ☐ Misread ☐ Turning Sequence ☐			
		OTHER : ☐			

DQA: _____ Date: _____



WORK ORDER NON-CONFORMANCE / UPDATE

QA Closed: _____ Date: _____

Work Order update only ☐

Work Order: _____ Part No. _____ NCR No. _____		DISPOSITION Rework ☐ Scrap ☐ Use-as-is ☐ Suspected Unapproved ☐		AGAINST DEPARTMENT/PROCESS Skid-tube ☐ Machining ☐ Thermoforming ☐ Large Fab ☐ Cross tube ☐ Small Fab ☐ Finishing ☐ Composite ☐ Water Jet ☐ Prod. Eng. Coord. ☐ Rec/Store/Packaging ☐ Supplier ☐ Engineering ☐ Quality ☐ Other ☐					
Date :		Step #:		QTY Effective :				MRB (QSI042) Approval 	
Description Work Order Deviation				Disposition					
								Completed By	
								Lead hand / Supervisor Approval Verification	
								QC / QA Coordinator Approval	

Root Cause			FAULT CATEGORY							
Environment	☐	No Re-verification	☐	Pressure/Forced	☐	Temperature/Cure	☐	Power Loss/Surge	☐	Positioned Wrong
Design	☐	Operator	☐	Bending	☐	Set-up	☐	Folio/Program	☐	Outside Dimensions
Doc/Data	☐	Offset/Setup	☐	Centre Not Concentric	☐	BOM/Route	☐	Grain	☐	Over/Under tolerance
Equip/Tooling	☐	Supplier	☐	Cracks	☐	Broken/Damage/Defect	☐	Weld	☐	Part Incorrect
Handling/Pre	☐	Training	☐	Crimp/Kink/Ripple/Wave	☐	Inspection Incomplete/Unqualified	☐	Wrong Stock Pulled	☐	Part Lost/Missing
Material	☐	Use for Testing	☐	Cuffs	☐	Contamination	☐	Out of Sequence	☐	Part Moved
Internal Transport	☐	Poor Information	☐	Crushing	☐	Countersink	☐	Off-set	☐	Drawing
Tribal Knowledge	☐	Rushing	☐	Heat Treat	☐	Cut Too Short	☐	Mislabeled	☐	Finish
LOA	☐	Product Improvement	☐	Wave/Twist in Tube	☐	Instructions Incomplete/Unclear	☐	Fit/Function	☐	Misread
Substation	☐	Process Improvement	☐	Marks/Chatter	☐	Drill Holes	☐	Misaligned/off center	☐	Turning Sequence
Past Expiry Date	☐	Manufacturing Process	☐	OTHER :						
Misidentified	☐	Past Due	☐							

Picklist Print

Page 1

Wednesday, February 03, 2016 4:29:41 PM

Work Order ID: 141303

141303

Parent Item: D4917-300

D4917-300

Parent Item Name: Placard, Max Load

Start Date: 1/29/2016

Required Date: 2/3/2016

Start Qty: 10.00

Required Qty: 10.00

Comments: IPP REV:A 13.12.31 NEW ISSUE DD VERF:RQ

Component Item ID/ Item Name	Replacement Item ID	Mfg/ Purch	Bin Item	Primary Location	Last Location	Route Seq ID	Unit of Measure	Qty on Hand	Qty per Kit	Total Qty	Qty Issued	Date Issued	Status
D4917-300P		Purchased		No			Each	0.0000		10			
D4917-300P									**	10x			
Placard, Max Load													

80/6-02-11

DQA: _____ Date: _____




WORK ORDER NON-CONFORMANCE / UPDATE

QA Closed: _____ Date: _____

Work Order update only ☐

Work Order: _____ Part No. _____ NCR No. _____	DISPOSITION Rework ☐ Scrap ☐ Use-as-is ☐ Suspected Unapproved ☐	AGAINST DEPARTMENT/PROCESS Skid-tube ☐ Machining ☐ Thermoforming ☐ Large Fab ☐ Cross tube ☐ Small Fab ☐ Finishing ☐ Composite ☐ Water Jet ☐ Prod. Eng. Coord. ☐ Rec/Store/Packaging ☐ Supplier ☐ Engineering ☐ Quality ☐ Other ☐			
Date :	Step #:	QTY Effective :		MRB (QSI042) Approval	
Description Work Order Deviation		Disposition		Completed By	
				Lead hand / Supervisor Approval Verification	
				QC / QA Coordinator Approval	
Root Cause Environment ☐ Design ☐ Doc/Data ☐ Equip/Tooling ☐ Handling/Pre ☐ Material ☐ Internal Transport ☐ Tribal Knowledge ☐ LOA ☐ Substation ☐ Past Expiry Date ☐ Misidentified ☐ No Re-verification ☐ Operator ☐ Offset/Setup ☐ Supplier ☐ Training ☐ Use for Testing ☐ Poor Information ☐ Rushing ☐ Product Improvement ☐ Process Improvement ☐ Manufacturing Process ☐ Past Due ☐		FAULT CATEGORY Pressure/Forced ☐ Bending ☐ Centre Not Concentric ☐ Cracks ☐ Crimp/Kink/Ripple/Wave ☐ Cuffs ☐ Crushing ☐ Heat Treat ☐ Wave/Twist in Tube ☐ Marks/Chatter ☐ Temperature/Cure ☐ Set-up ☐ BOM/Route ☐ Broken/Damage/Defect ☐ Inspection Incomplete/Unqualified ☐ Contamination ☐ Countersink ☐ Cut Too Short ☐ Instructions Incomplete/Unclear ☐ Drill Holes ☐ Power Loss/Surge ☐ Folio/Program ☐ Grain ☐ Weld ☐ Wrong Stock Pulled ☐ Out of Sequence ☐ Off-set ☐ Mislabeled ☐ Fit/Function ☐ Misaligned/off center ☐ Positioned Wrong ☐ Outside Dimensions ☐ Over/Under tolerance ☐ Part Incorrect ☐ Part Lost/Missing ☐ Part Moved ☐ Drawing ☐ Finish ☐ Misread ☐ Turning Sequence ☐			
OTHER : ☐					

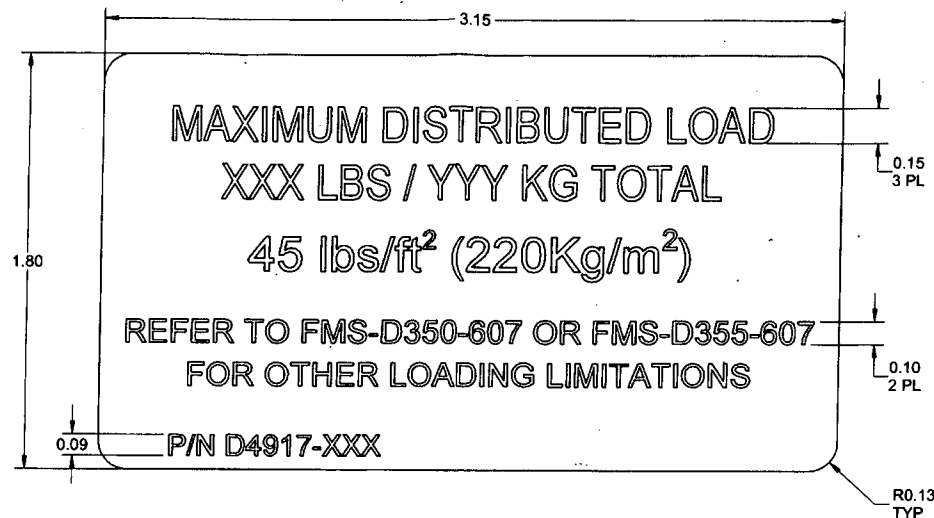

PROOF COPY
 SUBJECT TO
 UNCONTROLLED COPY
 SUBJECT TO AMENDMENT
 WITHOUT NOTICE
 WORK ORDER
 141303 MJS
 16-02-04

D4917-XXX PLACARD, MAX LOAD

PART NUMBER	LOAD
D4917-300	300 lbs / (136 kgs)
D4917-310	310 lbs / (141 kgs)
D4917-315	315 lbs / (143 kgs)
D4917-320	320 lbs / (145 kgs)
D4917-332	332 lbs / (151 kgs)
D4917-343	343 lbs / (156 kgs)

NOTES:

- 1) MATERIAL: MAKE FROM 3M 7 MIL MASKING FILM #8522CP ON AVERY IPM #2031 ARIAL FONT, RED LETTERING (0.31 HIGH) ON WHITE ADHESIVE BACK.
- 2) FINISH: N/A
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 6) IDENTIFICATION: IDENTIFY WITH DART "P/N D4917-XXX" USING ARIAL FONT, RED LETTERING (0.09" HIGH). WHERE XXX = MAX DISTRIBUTED WEIGHT IN LBS PER TABLE
- 7) WEIGHT: LESS THAN 0.01 lbs

REV	DESCRIPTION	BY	DATE
A	NEW ISSUE	AJS	13.06.06
DESIGN	AJS	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	AJS		
CHECKED	ML	DRAWING NO.	REV. A
MFG. APPR.	ML	D4917	SHEET 1 OF 1
APPROVED	ML	TITLE	SCALE
DE APPR.	ML	PLACARD, MAX LOAD	NTS
DATE	13.06.06	COPYRIGHT © 2013 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD	



Dart Aerospace Ltd.
1270 Aberdeen Street
Hawkesbury, ON K6A 1K7
Tel: 613 632 9577
Fax: 613 632 1053

PURCHASE ORDER

Purchase Order ID **PO31279**

Purchase Order Date 2/5/2016

PO Print Date 2/5/2016

Page Number 1 of 2

Order From :

VC-STU001

Ship To : DART AEROSPACE LTD

STUDIO DE LETTRAGE 2001
210 MAIN WEST
HAWKESBURY, ON K6A 2H6
CA

1270 ABERDEEN
HAWKESBURY, ON K6A 1K7
CANADA



Contact Name

Vendor Phone 613 632 5449

Buyer

Chantal Lavoie

Customer POID

Customer Tax #

10127-2607

Ship To Contact

Terms

Net 30

Ship To Phone

Currency

CAD

Ship Via:

Yours ppd

FOB

Destination-Collect

Ship Acct:

Line Nbr	Reference Vendor Part Number Line Comments Delivery Comments	Description/ Mfg ID	Req Date/ Taxable Promise Date	CD	Req Qty/ Unit of Measure	PO Unit Price	Extended Price
	D4917-300P	Placard, Max Load	2/11/2016 Yes 2/11/2016		10.00 Each	\$8.00	\$80.00
	AS PER DWG D4917 REV. A E141303						
	Line Total:						\$80.00
2	71401-45	PROCUREMENT QUALITY CLAUSES	2/11/2016 No 2/11/2016		1.00	\$0.00	\$0.00
	Procurement Quality Clauses A005 RIGHT OF ENTRY A007 FIRST ARTICLE INSPECTION (FAI) BY SELLER, (DOCUMENTATION MAINTAINED BY SUPPLIER) A013 SHELF LIFE CONTROLLED MATERIAL; 80% SHELF LIFE REQUIRED AT RECEIPT A026 CERTIFICATION OF MATERIAL CONFORMANCE A040 NOTIFICATION OF QUALITY ESCAPE A042 DART NOTIFICATION BY SUPPLIER A043 RETENTION OF QUALITY DOCUMENTS						

Note:

2/5/2016



210 Main Street West
Hawkesbury, ON K6A 2H6
Phone # 613-632-2001

Invoice


Date	Invoice #
2/11/2016	41780

Invoice To

Dart Aerospace Ltd
1270 Aberdeen
Hawkesbury
Ontario
K6A 1K7

Ship To

P.O. No.	Terms	Rep	Ship	Via	F.O.B.	Project
31279			2/11/2016			

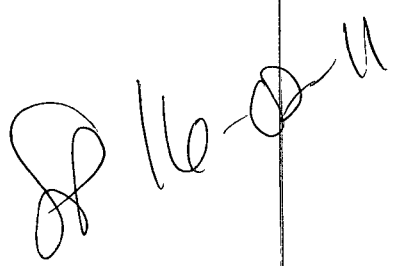Quantity	Item	Description	Price Each	Amount
10	4005	D4917-300. Attn: Chantal Ref: 17124 	8.00	80.00

Subtotal \$80.00

Thank you for your business.

Sales Tax \$10.40

Total \$90.40

******CERTIFICATE of CONFORMITY******

Customer:

Studio LeHage

Purchase Order N°:

31279

Packing Slip N°:

W00# 17124

Part N°:

Serial N°:

Description:

D4917-300

Quantity:

10

sp 16-0211

Certification:

We hereby certify that:

1. The above listed items were manufactured, repaired and/or inspected in accordance with applicable drawings and/or specifications;
2. All work was accomplished in accordance with the Dart Aerospace Purchase Order;
3. Results of all inspections, chemical or physical tests, as well as other evidence, which shows the acceptability of raw materials, parts and/or assembly components are on file and available for inspection at any time.

Authority:

Avery

APPROVAL: Valerie Young

Signature: Val. Z

Title: office administrator

DATE:

Feb 11, 16.

PRODUCT DATA SHEET



Avery® IPM™ 2031

issued: 01/04/2005

Introduction

Avery® IPM™ 2031 is a high quality pressure-sensitive vinyl film, designed for use on wide format inkjet printers. Avery® IPM™ 2031 has excellent printing properties, allowing crisp print quality with bright and vibrant colours. Avery® IPM™ 2031 offers rapid ink drying and a water-resistant material. It combines good adhesion during its life and easy removal afterwards.

Description

Facefilm: 80-micron premium white calendered, topcoated vinyl.

Adhesive: removable, acrylic based

Backing paper: one side coated kraft paper, 140 g/m²

Features

- Excellent printability
- Vibrant and bright colours
- Crisp print quality
- Spray water resistant wit specific pigmented inks
- Good adhesion, excellent removability
- Warranty on outdoor durability

Recommendations for use

A wide variety of full-colour graphics for indoor - and **short/medium term outdoor** applications such as posters, murals, displays, exhibition stands, vehicle graphics etc. Avery® IPM™ 2031 is suitable for application to a wide variety of substrates and will remove cleanly for up to 1 year after application.

IPM media should be handled with care as any surface contamination may affect the print quality. Media should be processed in an environment of 15-25°C and 30-70% relative humidity. After drying, the finished prints should be wrapped in polyethylene film and despatched flat or rolled with the printed side facing outwards. To protect prints against water, UV/light and abrasion, overlamination with a clear film is recommended. For specific details of Avery® DOL combinations, refer to "Technical Bulletin 5.3. Recommended combinations of Avery® Overlaminates and Avery® Digital Print Media"

Always test your combination of Avery® IPM™ medium, inkjet printer and inks prior to commercial use.

Compatibility

Avery® IPM™ 2031 is compatible with a broad selection of inkjet printers, when printing with pigmented, water based inks. For specific details refer to "Technical Bulletin 5.6 Avery Dennison Inkjet Print Media - Printer compatibility".

Durability:

Avery® IPM™ 2031 is warranted for outdoor use in conjunction with pigmented outdoor inks from HP, Encad and Colorspan. The warranted period varies from type of application and type of overlaminate from 18 months up to 5 years. For full details, see our Avery® IPM™ Outdoor warranty.



www.averygraphics.com

Graphics Division
Rijndijk 86, P.O. Box 118
2394 ZG Hazerswoude - The Netherlands
Tel +31 71 3421500 - Fax +31 71 3421538

PRODUCT CHARACTERISTICS

Avery® IPM™ 2031

Physical properties

Features	Test method ¹	Results
Caliper, facefilm	ISO 534	80 µm
Gloss	ISO 2813, 20°	1%
Dimensional stability	DIN 30646	0.3 mm. max
Adhesion, initial	FINAT FTM-1, stainless steel	180 N/m
Adhesion, ultimate	FINAT FTM-1, stainless steel	260 N/m
Flammability		Self extinguishing
Accelerating ageing	DIN 53587, 500h exposure	No negative impact on film Performance
Shelf life	Stored at 22° C/50-55 % RH	2 years
Removability		up to 1 year
Not when applied to: Nitro-cellulose paints, ABS, Polystyrene, certain types of PVC		
Durability ²	Overlaminated with DOL 4300	5 years
	Overlaminated with DOL 1000, DOL 1100 with overlaps	3 years
	Overlaminated without overlaps for static applications only	2 years
	Without overlaminate and used for static, Non-abrasive application ONLY	18 months

Only when printed with ENCAD GO, HP and Colorspan pigmented inks and when properly applied in accordance with our application instructions. Only applicable for vertical exposure.

Temperature range

Features	Results
Application temperature	Minimum: +10°C
Service temperature	-20°C to +80°C

Important

Information on physical and chemical characteristics is based upon tests we believe to be reliable. The values listed herein are typical values and are not for use in specifications. They are intended only as a source of information and are given without guarantee and do not constitute a warranty. Purchasers should independently determine, prior to use, the suitability of this material to their specific use.

All technical data are subject to change. In case of any ambiguities or differences between the English and foreign versions of these Conditions, the English version shall be controlling.

Warranty

Avery® branded materials are manufactured under careful quality control and are warranted to be free from defect in material and workmanship. Any material shown to our satisfaction to be defective at the time of sale will be replaced without charge. Our aggregate liability to the purchaser shall in no circumstances exceed the cost of the defective materials supplied. No salesman, representative or agent is authorised to give any guarantee, warranty, or make any representation contrary to the foregoing.

All Avery® branded materials are sold subject to the above conditions, being part of our standard conditions of sale, a copy of which is available on request.

1) Test methods

More information about our test methods can be found on our website.

2) Durability

The durability is based on middle European exposure conditions. Actual performance life will depend on substrate preparation, exposure conditions and maintenance of the marking. For instance, in the case of signs facing south; in areas of long high temperature exposure such as southern European countries; in industrially polluted areas or high altitudes, exterior performance will be decreased.



www.averygraphics.com

Graphics Division
Rijndijk 86, P.O. Box 118
2394 ZG Hazerswoude - The Netherlands
Tel +31 71 3421500 - Fax +31 71 3421538